

SEPTAGE & GREASE DEWATERING



Septage dewatering screw press with a capacity of 6,000 gallons/hour



APPLICATIONS

- Septage
- Grease Trap Sludge
- Portable Toilet Waste
- Blends of the above

FEATURES

- Fully Automatic, Unattended Operation
- Heavy Duty Construction
- Stainless Steel Wetted parts
- Custom Designed—Multiple Sizes
- Low Speed, Low Maintenance
- On-site Trial Units Available
- Complete Skid Mounted Units Available
- Fully Enclosed Covers



Dewatered Septage

SEPTAGE DEWATERING

- Operation With or Without Lime
- Can Produce Class A Biosolids
- 35–45% Cake Solids
- 45–55% Class A Cake Solids




Dewatered Grease


100% GREASE TRAP SLUDGE

- Operation With or Without Lime
- 45–60% Cake Solids With Lime
- 35–45% Cake Solids Without Lime
- Non-blinding screens


**Typical Process Flow Diagram
for Class A or Large Applications**

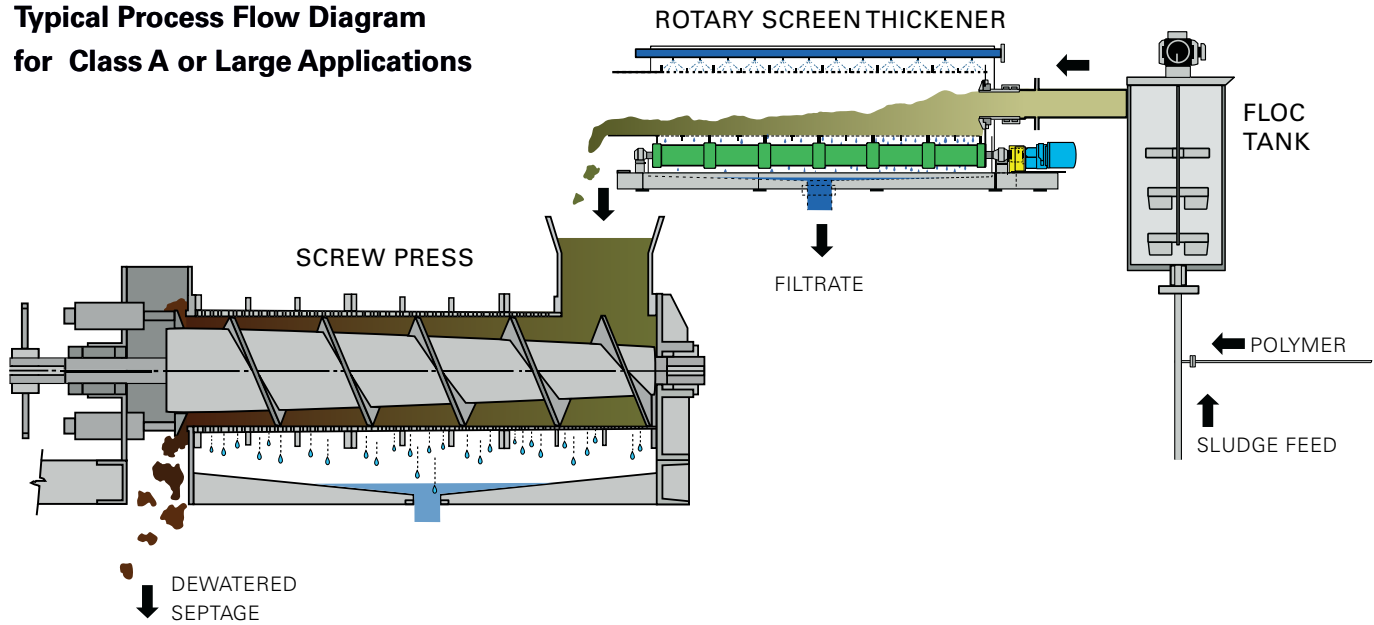

Typical Process Flow Diagram for Small Applications

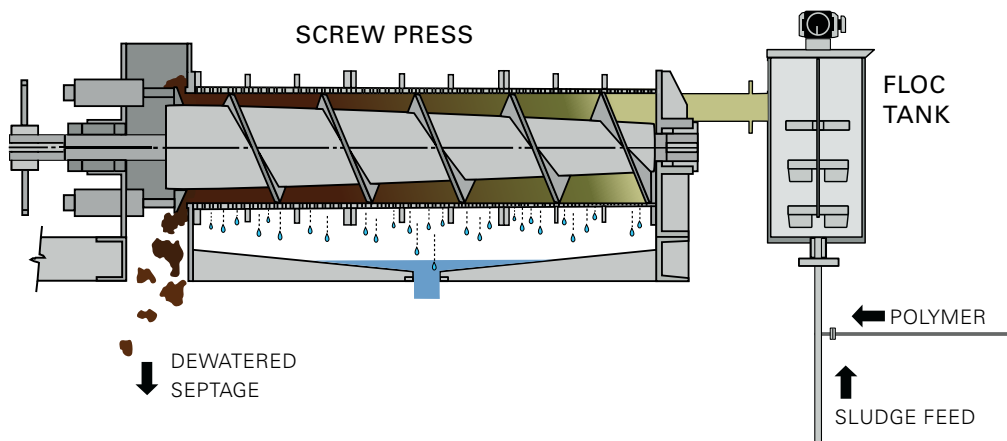

Skid Mounted Packages

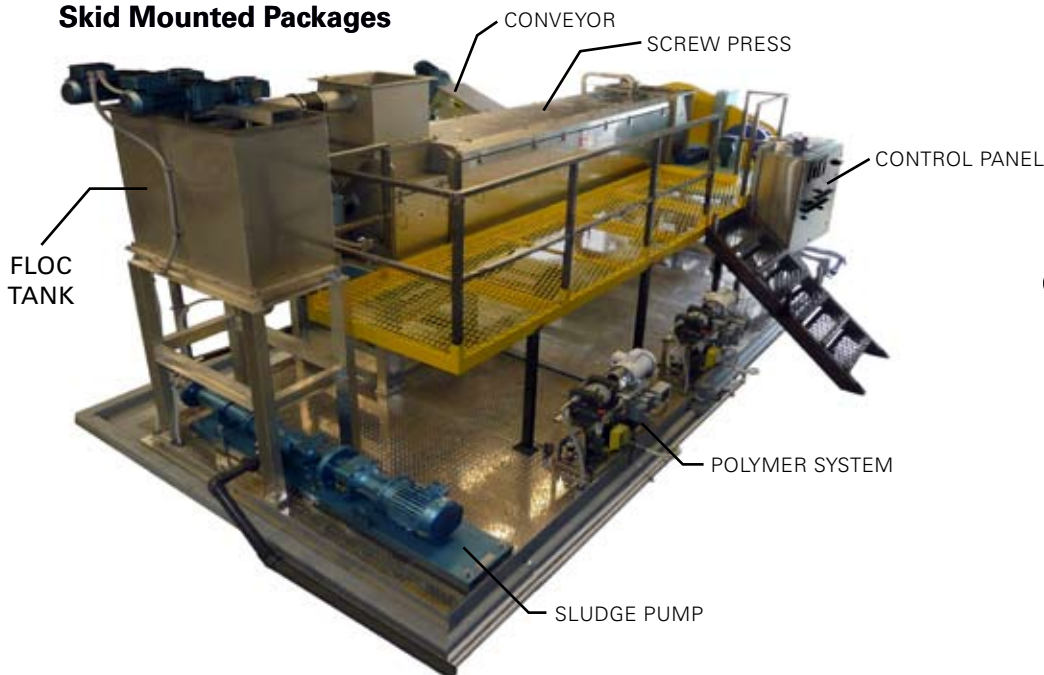

FKC Co., Ltd.
2708 W. 18th Street
Port Angeles, WA 98363
(360) 452-9472
www.fkcscrewpress.com
mail@fkcscrewpress.com